


Thermocouples

General Applications

Grommet Style

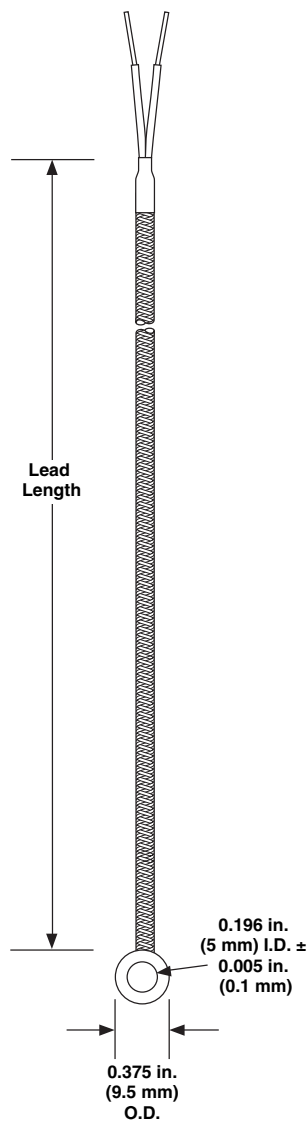

Extremely low profile of the stainless steel grommet provides fast response time.

Rapid Ship Sensors

Rapid Ship sensors come with 24 gauge solid fiberglass lead with stainless steel overbraid, grounded junction and a split lead termination.

Calibration	Lead Length		Part Number
	in.	(mm)	
J	48	(1219)	73XJFGA048A
	96	(2438)	73XJFGA096A

Custom Ordering Information—Items in **Bolded Green Type** are preferred with shorter lead times.

	1	2	3	4	5	6	7	8	9	10	11
	7	3	X			G	A				

1-2. Construction Style _____
 73 = Grommet thermocouple

3. Diameter _____
 X = Not applicable

4. Calibration _____
J = Type J T = Type T
K = Type K E = Type E

5. Lead Protection _____
F = Fiberglass (24 gauge solid)
 T = PFA (24 gauge solid)

6. Junction _____
 G = Grounded

7. Grommet Size (inch) _____
 A = 0.195 inch I.D. x 0.375 inch O.D. x 0.035 inch thick

8-10. Lead Length (inches) _____
012, 024, 036, 040, 048, 060, 072, 079, 096 and 120
 Available lengths: 006 to 360, over 360 consult factory

11. Terminations/Options _____
A = Standard, 2 ½ inch split leads
 B = 2 ½ inch split leads with #6 spade lugs
 C = 2 ½ inch split leads with #6 spade lugs and BX connector
 D = Standard male plug, quick disconnect
 E = Standard female jack, quick disconnect
 F = Miniature male plug, quick disconnect
 G = Miniature female jack, quick disconnect
 H = ¼ inch push-on connector