


RTDs and Thermistors

RTD Style RK

Emergency Use Cut-to-Length RTD

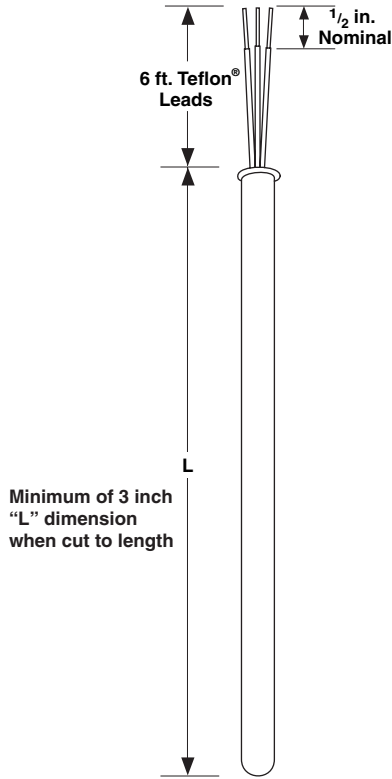

Rapid Ship Sensors

Rapid Ship sensors come with 100Ω DIN, 0.00385 curve, 316 stainless steel, 0.188 and 0.250 inch diameter, 24 AWG stranded Teflon® three-wire, temperature rating -50 to 260°C (-58 to 500°F), standard split end leads and no mounting fittings.

Class Accuracy	Diameter	"L" Dimension in. (mm)	Part Number (Contains Bag of Five Sensors)
A	0.188	12 (305)	RKH12A-05
	0.188	24 (610)	RKH24A-05
	0.250	12 (305)	RKJ12A-05
	0.250	24 (610)	RKJ24A-05

Adjustable C-Frame Tube Cutter	RK-Cutter
--------------------------------	-----------

NEW: Cut-to-length emergency RTD kit is a bag of five adjustable RTD sensors. Keep a bag of these items on your shelf for immediate, emergency replacement of RTDs to 24 inches in length.

Features and Benefits

Cut-to-length features

- Avoids need to stock several RTD lengths

Probes can be shortened

- To three inches minimum using a tubing cutter

High accuracy

- Dependable reading, three-wire, Class A DIN 0.00385 curve

Internally sealed

- Prevent moisture penetration

316 SS sheath

- -50 to 260°C (-58 to 500°F)

Teflon® is a registered trademark of E.I. du Pont de Nemours & Company.