


Accessories

Hardware Bayonet Fittings

Adjustable Bayonet Compression Fitting

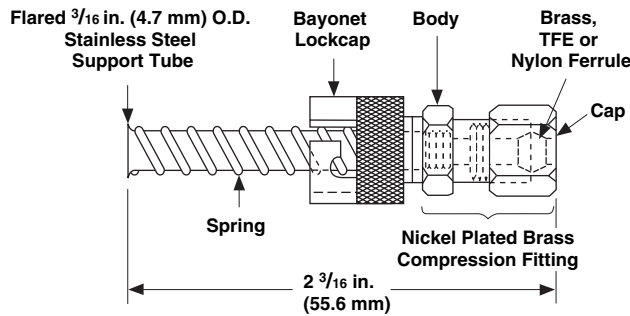


This fitting combines the features of the fixed bayonet fitting in a compact unit which does not require brazing to assemble.

The fitting is designed for 0.125 in. (3 mm) O.D. sensor and is available with either brass, TFE or nylon ferrules.

With either the TFE or nylon ferrules, this fitting may be relocated at different positions along the sheath whenever changes in the immersion length are necessary. Brass ferrules cannot be relocated once they are set.

Part No.	Description
TH-2762-BR	Adjustable bayonet fitting with brass ferrule
TH-2762-NY	Adjustable bayonet fitting with nylon ferrule
TH-2762-T	Adjustable bayonet fitting with TFE ferrule

Fixed Bayonet Fitting



Part No.	Description
TH-2760	Lockcap, spring and spring stop

When used together, a bayonet fitting and bayonet adapter act as a spring-loading device for bottoming a thermocouple hot junction in a hole. The fitting is designed for use on 0.188 inch O.D. sensor. The TH-2760 includes the lockcap, spring and spring stop, which require brazing for assembly.

The adapter requires a tapped 1/8 inch NPT or 3/8 24 hole for mounting. All components are nickel plated steel.

Note: All accessories subject to minimum purchase quantities.